

CONTENTS Precautions ----- Page 2 Description of product control keys ----- Page 8 Function introduction and instruction for use APP control and APP on-line control ----- Page Packing list ----- Page 17

photography enthusiasts. The product is suitable for live / outdoor / stud ① Step-less adjustable RGB color and dual color temperature feature, colo range 3200K ~ 5600k, with 672 LED bulbs, which is helpful to restore and enrich the color of objects and provide you with natural and vivid shooting

1. Before using this product, please read the instructions carefully and make sure use the product correctly. If you don't obey the instructions and warnings, Product Name : Photography lights Product Type : Photography Fill Light

- carefully, understand and acknowledge all the terms and contents of this statement, and promise to take full responsibility for the use of this product and possible
- effectively control the light. You can also install soft light board to avo excess light, make the light softer, and customize the fill light, allowing
- ④ The product can simulate 8 kinds of scene lights: Lightning, Police ca
- Candlelight, TV, Bad light bulb, Party, disco, Paparazzi. when shooting. Before using the product, you are strongly recommended to
 - - Product Weight: 1.6KG

♦ Hue: RGB 0°~360°

◆ SAT: 0%~100%

Product material : Plastic

Lamp beads quantity: 672 Color temperature: 3200K~5600K

App intelligent control system, which can be controlled by your intelligent

specification to power the product. Do not use power adapter with

The product is not waterproof, please use it in rainproof environment.

Product Size (mm): 300*230*55 Cooling: Natural heat dissipation Commodity origin : China. Huizhou

Brightness: 8000lux/0.5m, 2500lux/1m

 Light adjustment method : Step-less adjustment Light angle of lamp bead: 45°&120°

Features / Features : APP, Joint control,

Power supply mode : DC&Battery

Power supply: DC15V/4A Battery: lithium battery*2 (Need to bu

Lamp holder fixing knob Lamp rack interface

1 The lamp can be installed and fixed on the bracket by rotating the kn

clockwise, and unloaded by rotating in the counterclockwise direction

2 Insert the diffuser from above

supply. (both battery cells must be plugged in to power)

Battery Installation Slot

(Battery Lead)

There are two power supply modes to choose. ① Connect the power cord and adapter for power supply.

② Purchase two other suitable lithium batteries and use them for pc

battery power of the light.

- - Press the mode button to change the control mode, such a
- 5 Brightness adjustment button: Adjust the brightness
- Rotate, slave, master, APP 6 Multifunctional button: Press once to switch light mode. Press for 3
- seconds to enter/exit the scene mode; Spin the knob to adjust the behind the light.
- parameters of the current light mode. Slave mode: The channel can only be adjusted through the 7 LCD screen: The screen display the current brightness, control mode, buttons of the controller behind the light. When the channels of the slave light mode, light parameters, scene number, channel numerical, and

and the master are the same, they can be synchronously controlled by

The screen display the current brightness, control mode, light mode, light

parameters, scene number, channel numerical, and battery power of the light.

behind the light, and the slaves of the same channel will also be adjust

synchronously.

scene mode.

• In Master mode / Rotate mode, short press the composite knob to swit

In APP mode, connect to APP and adjust SAT through APP.

CCT: adjustable color temperature, range 3200K~5600K

HUE: Adjustable light color, range 0°~360° SAT: adjustable light color saturation, range 0%~100%

SC: The product can simulate 8 kinds of scene lights: ①Lightning,

car, ③Candlelight, ④TV, ⑤Bad light bulb, ⑥Party, ⑦Disco, ⑧Papa

• In Master mode / Rotate mode, turn the brightness adjustment kn adjust the brightness.

In APP mode, connect to APP and adjust brightness through A

In Master mode/Slave mode, tap the plus/minus key to set the channel val

In Master mode / Rotate mode, short press the composite knob to switch the light mode to CCT, and then turn the composite knob button to adjust

Switch the photography light to the APP mode, connect the Bluetooth of the

6 Adjust SAT: range 0%~100%

others to Slave mode, and set the channel (CH) of the master and slave When the master and slave channels are the same, the slave of the sam channel can be synchronously controlled through the controller behind

Prepare two or more photography lights, set one to APP mode, and

connect the mobile phone APP to set the channel; set the rest to Slave ⑦ Adjustment scene (SC): range 1~8

by rotating the brightness adjustment knob; the current scene When

is scene No. ⑤, turn the compound knob to adjust the color temperatur

adjust the time. (Other scenes can only adjust the brightness).

mode, and set the same channel. When the APP mode machine connected with the mobile phone APP and the slave machine channel are the same, at this time, the connected APP mode machine can be controlled throug the mobile phone APP, and the slave machine of the same channel as the APP mode machine can be synchronously controlled. composite knob to enter/exit scene light (SC) mode. At this time, short

• Prepare two or more photography lights, set one to Master mode, and the

channel as the connected APP mode machine.


Do not put the product in a highly humid, strong electromagnetic fie

long time, disconnect the power and take out the battery.

load the battery, in order not the damage to machine.

ones, in order to maximize the performance.



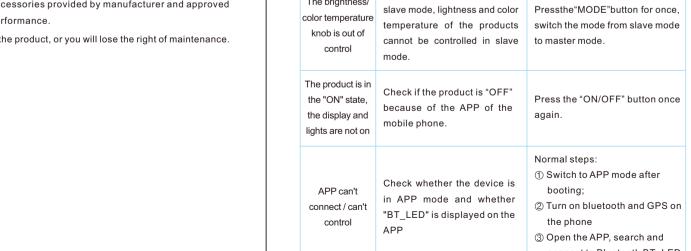

does not light up ② When using lithium battery, Charge the battery before using

the lamp beads SAT value is too low or 0; the

have no RGB color purity value is 100, the color. color difference is most obvious.

through APP.

adjust color pure SAT

the angle of the panel you need, and then tighten the angle locking

Change channel button: When is in master/slave mode, press this butt

(5) Adjust HUE: range 0° ~ 360°

camera light through the mobile phone, and then use the APP to control the brightness, color temperature, hue, sat, scene, channel, and on/off of the camera light. If there is a slave, you can also go through the APP Perform

application software on the phone (The phone needs to turn on bluetooth and

named "BT_LED" and connect \rightarrow Wait for connection \rightarrow After connect

make sure there's no "low ...

power" protection.