

封底内页

→ 120.00 mm →





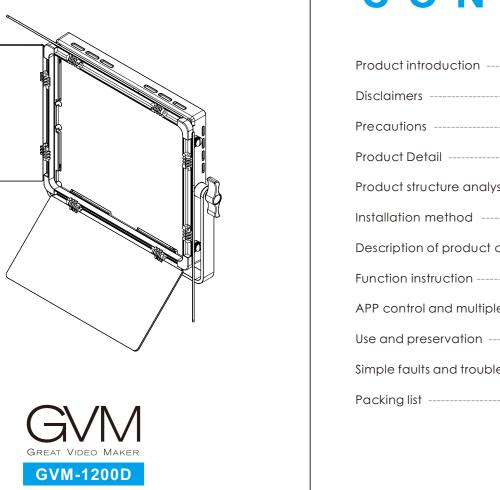

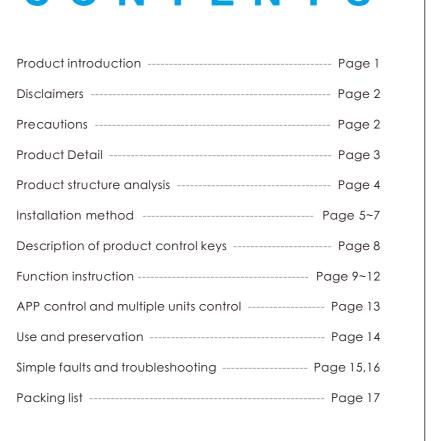

封面内页

CONTENTS

use the product correctly. If you don't obey the instructions and warnings, Welcome to "GVM-1200D". This product is specially designed for ser maybe cause harm to yourself and the people around, or even damage the photography enthusiasts. The product is suitable for live / outdoor / studio photography, and also for youtube video shooting. The main features o

carefully, understand and acknowledge all the terms and contents of this statement, and promise to take full responsibility for the use of this product and possible temperature range 3200K ~ 5600k, with 928 LED bulbs, which is helpful

to reduce energy loss.

- ② App intelligent control system, which can be controlled by your intelligent
- ③ With an LED screen and stable system, it supports 360° rotation and can effectively control the light. You can also install barn-door and soft lig
- Candlelight, TV, Bad light bulb, Party, disco, Paparazzi.
 - when shooting. Before using the product, you are strongly recommended to
 - Product Size (mm): 326*320*73 (5) If the product will not be used for a long time, please switch off th
 - Cooling: Aluminum heat dissipation Commodity origin : Huizhou, China

Product Name : Photography lights

♦ Hue: RGB 0°~360°

◆ SAT: 0%~100%

- Product material : Aluminum alloy Lamp beads quantity: 928

- board to avoid excess light, make the light softer, and customize the specification to power the product. Do not use power adapter with light, allowing you to easily and casually shoot the desired results
- $\ensuremath{\textcircled{4}}$ The product can simulate 8 kinds of scene lights: Lightning, Police c
- 3 The product is not anti-corrosion, therefore do not let the product tour We believe that once using our product correctly, you can make huge progress

- Brightness: 22000lux/0.5m, 7300lux/1m

- Product Type : Photography Fill Light

Lamp rack interface —

- Special light, Upgrade LED screen
- Power supply: DC15V/4A

- Color temperature : 3200K~5600K
- Light adjustment method : Step-less adjustment

Brightness Compound knob buttons

Lamp holder fixing knot

2 Loosen the adjustment knobs on both sides of the U-bracket, adjust the angle of the panel you need, and then tighten the adjustment

knobs on both sides of the U-bracket.

There are two power supply modes to choose.

① Connect the power cord and adapter for power supply.

supply. (both battery cells must be plugged in to power)

 $\ensuremath{ \bigcirc \! \! \! |}$ Purchase two other suitable lithium batteries and use them for power power

- Barn-door ____

- Features: RGB, SAT, APP (Bluetooth connection), Joint control, High CF
- Battery Capacity: NP series battery (to be purchased separately)

the light mode to SAT, and then turn the composite knob button to

- SC: The product can simulate 8 kinds of scene lights: ①Lightninç

Master mode: adjust the light and channel of the light through the controlle

- adjust the brightness.

- Change channel button: When is in master/slave mode, press this button
- Press the mode button to change the control mode, such a to select the channel. Rotate, slave, master, APP 5 Brightness adjustment button: Adjust the brightness

1 DC15V power input interface

battery power of the light

3 Mode control button: Change mode control

- 6 Multifunctional button: Press once to switch light mode. Press for 3
- behind the light. seconds to enter/exit the scene mode; Spin the knob to adjust the Slave mode: The channel can only be adjusted through t parameters of the current light mode.

Channel value ——

7 LED screen: The screen display the current brightness, control mod light mode, light parameters, scene number, channel numerical, and

buttons of the controller behind the light. When the channels of the slav and the master are the same, they can be synchronously controlled by

The screen display the current brightness, control mode, light mode, light

parameters, scene number, channel numerical, and battery power of the light.

• In APP mode, connect to APP and adjust hue through APF

by rotating the brightness adjustment knob; the current scene When

is scene No. ⑤, turn the compound knob to adjust the color temperatur

adjust the time. (Other scenes can only adjust the brightness).

- behind the light, and the slaves of the same channel will also be adju-6 Adjust SAT: range 0%~100%
 - In Master mode / Rotate mode, short press the composite knob to sw
 - In APP mode, connect to APP and adjust SAT through APP.
- CCT: adjustable color temperature, range 3200K~5600K
- HUE: Adjustable light color, range 0°~360° ⑦ Adjustment scene (SC): range 1~8
- SAT: adjustable light color saturation, range 0%~100%
- composite knob to enter/exit scene light (SC) mode. At this time, short
- car, ③Candlelight, ④TV, ⑤Bad light bulb, ⑥Party, ⑦Disco, ⑧Papara

3 Adjust brightness (BRG): range 0%~100%

scene mode.

synchronously.

- In Master mode / Rotate mode, turn the brightness adjustment kn

- In Master mode / Rotate mode, short press the composite knob to switch the light mode to CCT, and then turn the composite knob button to adjust In Master mode/Slave mode, tap the plus/minus key to set the channel val
 - the color temperature.

⑤ Adjust HUE: range 0° ~ 360°

In Master mode / Rotate mode, short press the composite knol

Switch the photography light to the APP mode, connect the Bluetooth of the video light through the mobile phone, and then use the APP to control the

brightness, color temperature, hue, sat, scene, channel, and on/off of the video light. If there is a slave, you can also go through the APP Perform

• Prepare two or more photography lights, set one to Master mode, and the others to Slave mode, and set the channel (CH) of the master and slave

When the master and slave channels are the same, the slave of the same

Prepare two or more photography lights, set one to APP mode, and

mode, and set the same channel. When the APP mode machine connected with the mobile phone APP and the slave machine channel are the same,

the mobile phone APP, and the slave machine of the sam-APP mode machine can be synchronously controlled.

connect the mobile phone APP to set the channel; set the rest to Slave

- channel can be synchronously controlled through the controller behind
 - ong time, disconnect the power and take out the battery.

 - You can save 6 custom light effects in "My Scenes". After setting the light

Do not put the product in a highly humid, strong electromagnetic field

- GPS), then enter the bluetooth's search interface \rightarrow Find the bluetoot
- named "BT_LED" and connect \rightarrow Wait for connection \rightarrow After conn
 - **Power:** Make sure the power is in the demanded range, not too high or too low. Correctly load the battery, in order not the damage to machine.

effect parameters ightharpoonup click the " ightharpoonup" icon in the right corner ightharpoonup pop up the "Save Current Scenes" → click "OK". This light effect can be found in "My

If there is a slave, the APP will synchronously control the slave of the same

The brightness/
color temperature
knob is out of
control

slave mode, lightness and color
temperature of the products
cannot be controlled in slave
mode.

Pressthe"MODE"button for once,
switch the mode from slave mode
to master mode.

make sure there's no "low

power" protection.

the lamp beads SAT value is too low or 0; the does not light up ② When using lithium battery, Charge the battery before using

In RGB mode, Check whether the color purity

through APP.

adjust color pure SAT