
GVM

→ 120.00 mm →





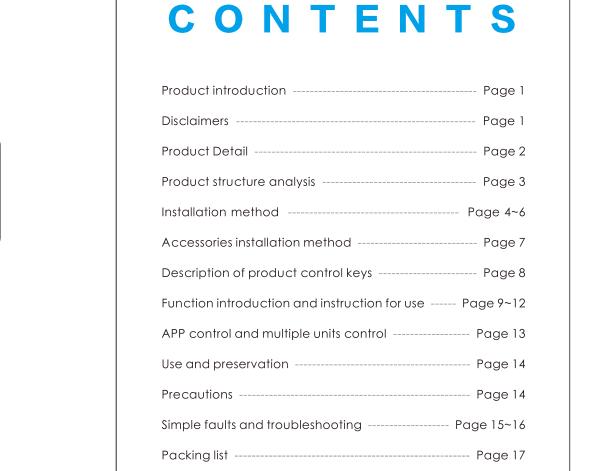

Welcome to "GVM-50RS-II". This product is specially designed for senior photography enthusiasts. The product is suitable for live / outdoor / studio photography, and also for YouTube video shooting. The main features of the product are: ① Step-less adjustable RGB color and dual color temperature feature, color range 3200K ~ 5600k, with 1088 LED bulbs, which is helpful to restore and enrich the color of object Features: RGB, SAT, APP, Joint control, Special light High color rendering index light beads, Upgrade LED scre ③ With an LED screen and stable system, it supports 360 rotation and can effective control the light. You can also install folding and soft light board to avoid excess light ◆ Color rendering index : ≥97 make the light softer, and customize the fill light, allowing you to easily and casually Color temperature: 3200K~5600K ♦ Hue: RGB 0~360° TV, Bad light bulb, Party, disco, Paparazzi. ◆ SAT: 0%~100% We believe that once using our product correctly, you can make huge progress when Brightness: 25000lux/0.5m, 9000lux/1m Light adjustment method : Step-less adjustment Product Weight: 1.9KG Product Size (mm): 270*263*40 Power: 50W ◆ Voltage : AC:100-240V Power supply mode : DC input&Battery use the product correctly. If you don't obey the instructions and warnings, Battery Capacity: 7.4V-4400mAh*2 (to be purchased separate maybe cause harm to yourself and the people around, or even damage the Power supply: DC15V/4A Cooling: Natural heat dissipation Product material : Aluminum alloy carefully, understand and acknowledge all the terms and contents of this statement, and promise to take full responsibility for the use of this product and possible Commodity origin : China. Huizhou

LED lamp beads

1 The lamp can be installed and fixed on the bracket by rotating the kno

attery Installation Slot angle of the panel you need, and then tighten the adjustment knobs or

There are two power supply modes to choose. Connect the power cord and adapter for power supply. Purchase two other suitable lithium batteries and use them for power supply. (both battery cells must be plugged in to power) Light control folding can control the Angle of light. Align the front mounting holes with the screw holes of the hinges and lock 1 DC15V power input interface 3 Mode control button: Change mode control 4 Change channel button: When is in master/slave mode, press this butt

The screen display the current brightness, control mode, light mode, light parameters, scene number, channel numerical, and battery power of the light.

to select the channel.

battery power of the light.

SAT: Adjustable light color saturation, range 0%~100% SC: The product can simulate 8 kinds of scene lights: ①Lightninç

car, ③Candlelight, ④TV, ⑤Bad light bulb, ⑥Party, ⑦Disco, ⑧Papa

CCT: Adjustable color temperature, range 3200K~5600K

3 Adjust brightness (BRG): range 0%~100% • In Master mode / Rotate mode, turn the brightness adjustmen

adjust the brightness.

In APP mode, connect to APP and adjust brightness through A

synchronously.

scene mode.

In Master mode / Rotate mode, short press the composite knob to switch the light mode to CCT, and then turn the composite knob button to adjust

• Press the mode button to change the control mode, such as:

Rotate, slave, master, APP 5 Brightness adjustment button: Adjust the brightness

of the controller behind the light. When the channels of the slave and the light mode, light parameters, scene number, channel numerical, and

• In APP mode, connect to APP and adjust hue through APF behind the light, and the slaves of the same channel will also be adju

6 Adjust SAT: range 0%~100%

When the master and slave channels are the same, the slave of the sam • In Master mode / Rotate mode, short press the composite knob to switch channel can be synchronously controlled through the controller behind

• In APP mode, connect to APP and adjust SAT through APP.

adjust the time. (Other scenes can only adjust the brightness).

• In the APP mode, connect to the APP and adjust the scene through the APF

In Master mode/Slave mode, tap the plus/minus key to set the channel val

Switch the photography light to the APP mode, connect the Bluetooth of the

camera light through the mobile phone, and then use the APP to control the

camera light. If there is a slave, you can also go through the APP Perform

brightness, color temperature, hue, sat, scene, channel, and on/off of the

7 Adjustment scene (SC): range 1~8

HUE: Adjustable light color, range 0~360°

composite knob to enter/exit scene light (SC) mode. At this time, short

rotating the brightness adjustment knob; the current scene When it is scene No. ⑤, turn the compound knob to adjust the color temperature

• Prepare two or more photography lights, set one to Master mode, and the

others to Slave mode, and set the channel (CH) of the master and slave

Prepare two or more photography lights, set one to APP mode, and connect

set the same channel. When the APP mode machine connected with the

mobile phone APP and the slave machine channel are the same, at this

mobile phone APP, and the slave machine of the same c^{μ}

time, the connected APP mode machine can be controlled through the

the mobile phone APP to set the channel; set the rest to Slave mode, and

channel as the connected APP mode machine.

application software on the phone (The phone needs to turn on bluetooth and

"BT_LED" and connect → Wait for connection → After connect success, it will

You can save 6 custom light effects in "My Scenes". After setting the light effect parameters \rightarrow click the " \blacksquare " icon in the right corner \rightarrow pop up the

"Save Current Scenes" \rightarrow click "OK". This light effect can be found in "M



specification to power the product. Do not use power adapter with

- different output voltage parameters.

load the battery, in order not the damage to machine.

does not light up ② When using lithium battery, ... Charge the battery before using

color temperature knob is out of kno

cannot be controlled in slave to master mode.

power" protection.

the lamp beads SAT value is too low or 0; the

have no RGB color purity value is 100, the