

CONTENTS

Welcome to use "GVM-ST200R". This product is specially designed for senior photographers. The usage scenarios of the product are suitable for live broadcast / outdoor / studio photography, etc., and can also be used for YouTube video shooting. The main features of the product are: direct sunlight, high temperature environment. If the product is not to be used for a long time, disconnect the power supply.

Cleaning: Please unplug the power plug before cleaning. And use a damp cloth instead of any detergent or soluble Liquid, so as not to damage the ① The light can be adjusted steplessly, with 1 dual-color temperature lamp be RGB lamp bead, with color rendering index of 97+, which helps restore are the colors of objects, providing you with natural and vivid shooting effects.

Power supply: Ensure that the power supply is within the scope of us

④ It has a LCD screen display and stable system, supports 180°rotation, which can effectively control the light. Equipped with a standard cover, after installation, it can avoid excess light, make the light more concentrated, and customize the control fill the light, allowing you to shoot the desired results easily.

HSI mode: Adjustable hue, saturation, light intensity, (HSI=hue, saturation, light intensity), realize 36 million colors adjustable.

.ight source matching mode: This mode provides 12 different styles of light sou

i-color light effect mode: This mode provides 8 white light effects: lightning cole, wax candle, broken light bulb, TV, paparazzi, explosion, breathing light. and even damage the product or other surrounding items.

and promise to take full responsibility for the use of this product and the possible consequences.

Product Type: Photography fill light

Accessories: Please use the accessories provided by the manufacturer or approved accessory products in order to make thebest use of

RGB mode: Adjustable red light, green light, blue light, and achieve 1.6 X 10 colors

Product material: aluminum alloy + plastic

⑤ 7 lighting modes, CCT mode, HSI mode, RGB mode, GEL color paper mode, light source matching mode, Bi-color light effect mode, IPL light effect mode:

Before using this product, please read the text carefully to ensure that the product to choose from. When you need a specific light source, it can save a lo has been operated correctly. Failure to follow and do not follow the instructions and

ight effect mode: This mode provides 4 types of IPL light effect: disco, pa and warning, understand and acknowledge all terms and contents of this statement

too high or too low will affect the work.

Product size (mm): 290×212×123 Controller size (mm): 120×145×273

warnings in this document may cause injury to you and the surrounding people 2. Once you use this product, you are deemed to have carefully read the disclaime

We believe that once using our product correctly, you can make huge progress when shooting. Before using the product, you are strongly recommended to read the instructions below carefully.

Controller net weight: 1.8KG

Maintenance: If there is a malfunction or performance degradation, please do not open the shell package by yourself to avoid damage the machine has lost maintenance rights In the event of a malfunction, please feel free to contact us, we Will do our best to solve the problem.

Lamp holder interface Lumens: Without spotlight cover: 7700 lux/1m; Added spotlight cover: 52000 lux/1m

CCT mode: Bi-color light mode, adjustable light intensity and color temperature.

Function/feature: LCD screen, high CRI lamp bead

Warranty: Do not modify the product, otherwise the right to repair will Light adjustment method: stepless adjustment

Power: 200W

Voltage: AC: 100-240V Heat dissipation: radiator + fan


Design and specifications are subject to change without notice.

Bowens mount ____



Angle lock handle

Lamp holder interface

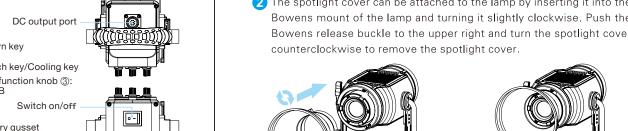


Battery gusset DMX interface


1 Loosen the lamp holder fixing knob, install the lamp on the lamp holder as


shown in the figure below, and then tighten the lamp holder fixing knob.

3 Loosen the angle lock handle, adjust the angle of the spotlight, and then tighten the angle lock handle.

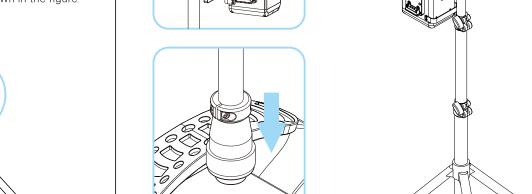

5 As shown in the following steps, first install the controller to the controller fixing clip, and then connect the output cable.

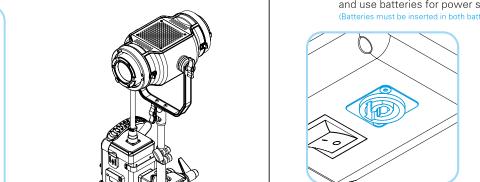

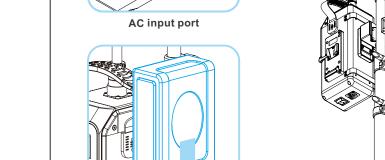

6 There are two power supply modes to choose from:

② Purchase two suitable lithium batteries separately



the light is off, press and hold to turn on the light; when the light is on, press and hold to

1 Knob 1: INT/SELECTOR/R, multi-function

or rotating to "select" or "brightness/red"

2 Knob 2: CCT/HUE/G, multi-function coding

knob, can adjust the "color temperature/hue/

coding knob, can be adjusted by pressing

turn off the light, and start the large air volume to dissipate until the temperature drops to a touchable temperature.

3 Rotary button 3: SAT/B, multi-function coding rotary button, you can use the rota button to adjust "color purity/blue" parameters







By adjusting the light intensity and color temperature

the [rotary button 1] to adjust the brightness, and

[INT] adjustment / [RGB] adjustment.

Press [MODE key] to switch to [RGB] mode \rightarrow press [rotary button ①] to switch the parameters of [R], the [rotary button ②] to adjust the

Two types of colored papers, ROSCO and LEE it provides. Each of the two

press the [rotary button 1] to enter the menu sele

FAN MODE:Select cooling fan mode, [Auto/Quiet/High] → turn the [rotary button ①] to select the [Rosco] menu

or the [LEE] menu ightarrow press the [rotary button 1] to

enter the selected menu ightharpoonup turn [rotary butt

Press the MENU button to enter the menu setting page ightarrow turn the [rotary



 \rightarrow Rotate[rotary button ①] Select the light type \rightarrow pres [rotate button 1] to enter this type \rightarrow Turn [rot

Press [MODE key] to switch to [HSI] mode \rightarrow turn knob 1].To adjust the brightness, turn the [rotary button

mode \rightarrow press [rotation button ①] to enter the → rotate [rotation button ①] to select the light ty press [rotation button ①] to enter this typ

[rotation button ①] to select light type → press [rotation

adjust the color temperature, turn the [rotary button ③] to

Bluetooth of the lighting device;

② On the "My Devices" page, click the "Add Device that have been turned on, and select the device that needs to be connected for network connection.

iOS version: App Store

There may be delay in sending the verification

*The Android system needs to enable location permission to use Mesh technology to conr to the device. During this process, we will collect any of your location information.

①Whether the connection between the lamp and the power supply is normal. "low battery" protection.

After the APP enters to add a Check whether the device is

Check whether the device is The App fails to turned on normally and whether connect to the network configuration that the network configuration to the network configuration to the network configuration to the network configuration to the network connect to the network configuration to the ne

of the device. network conditions of the mobile phone are good.

lighting equipment, your

equipment will be displayed in

① After successfully adding your ② Click the device bar to enter th