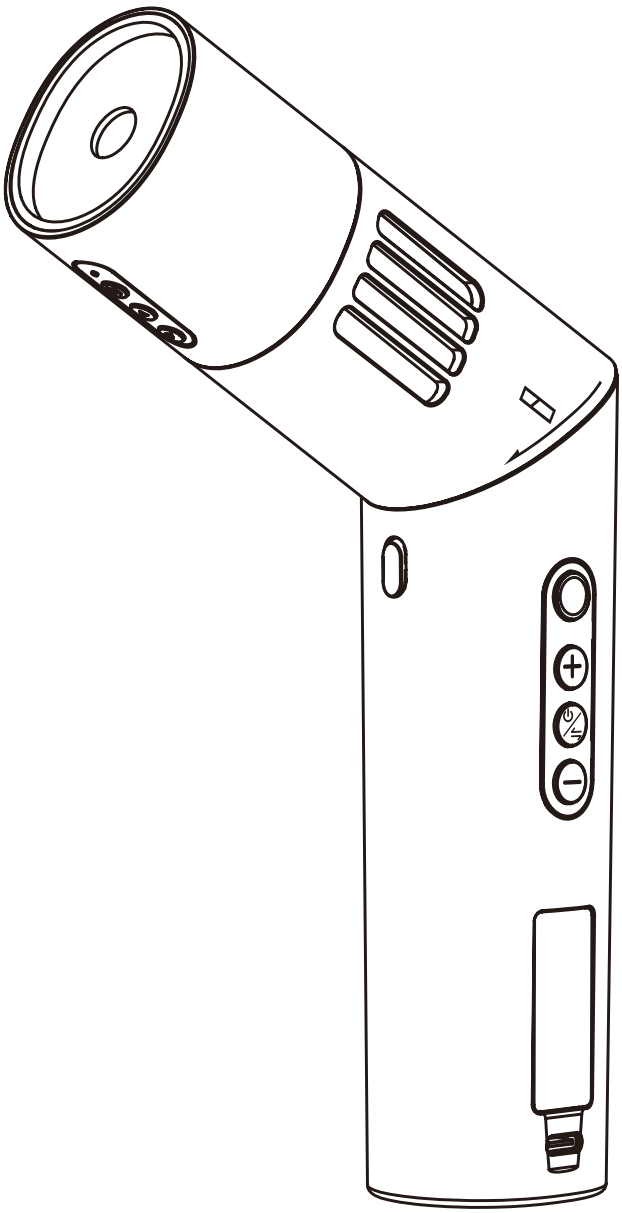


GVM

GF5

V0

CONTENTS

Caring For Your GVM Product ---------- Page 1

Disclaimers ---------- Page 2

Specifications ---------- Page 2

Product Instructions ---------- Page 3

Packing List ---------- Page 4

Operation Instructions ---------- Page 5~10

Warranty ---------- Page 11

CARING FOR YOUR GVM PRODUCT

- Please keep the product in a dry, clean, dust-free environment.
- Keep corrosive chemicals, liquids, and heat sources away from the product to prevent mechanical damage.
- Use only a soft and dry cloth for cleaning the product.
- Malfunction may be caused by dropping, the impact of external force.
- Do not attempt to disassemble the product. Doing so voids the warranty.
- Please have the product checked or repaired by authorized technicians if any malfunctions happen.
- Please remove the USB charging cable when the battery is fully charged.
- The product might get hot during use, which is normal. Please allow a certain space for the heat sink when using it.
- If you do not use the product for a long time, it might not be able to turn on instantly due to the dead battery. Please charge the product and it can resume work. Please charge the product every 3 months regularly.
- Failure to follow all the instructions may result in mechanical damage.
- Warranty does not apply to human errors.


DISCLAIMERS

1. Before using this product, please read the text carefully to ensure that the correct operation of the product has been carried out. Failure to follow and not following the instructions and warnings in this document may cause harm to you and others around you, or even damage the product or other surrounding items.
2. By using this product, you are deemed to have carefully read the disclaimer and warning, understand and acknowledge all the terms and contents of this statement, and promise to take full responsibility for the use of this product and the possible consequences.
3. Design and specifications are subject to change without notice.

SPECIFICATIONS

Product	GF5
Size	231×48×42mm (Fog Machine) 51×48×42mm (Magnetic Fan)
Weight	351g (Fog Machine) 47g (Magnetic Fan)
Power	40W
Battery Capacity	2500mAh
Chamber Capacity	13ml
Runtime	Battery: 30min @ 100% Output Chamber(13mL): 15min @ 100% Output)
Charging Time	2H

PRODUCT INSTRUCTIONS

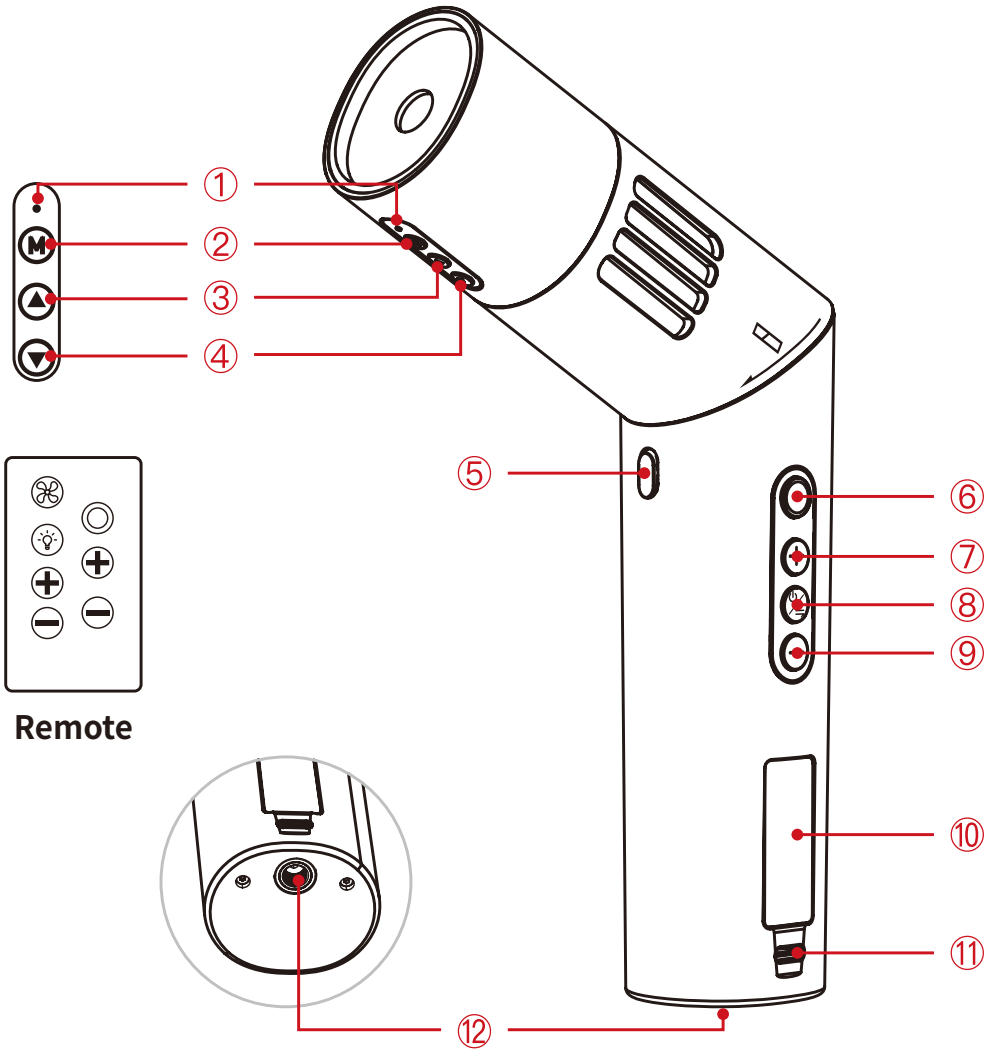

① Indicator	⑤ Rotation Lock Button	⑨ Button -
② Button M	⑥ Fog Output Button	⑩ Screen
③ Button ▲	⑦ Button +	⑪ Type-C Charging Port
④ Button ▼	⑧ Power Button	⑫ 1/4 Screw Hole

PACKING LIST




Fog Machine ×1




Flexible Pipe ×1



Adapter Cover ×1



Chamber ×1



Magnetic Fan &
RGB Light ×1




Bent Tube ×2




Straight
Tube ×1




Tube Adapter ×1



Remote ×1



Fog Juice
(60ml) ×1



Type-C Charging
Cable ×1



Carrying Bag ×1



Open Cell Foam ×1


OPERATION INSTRUCTIONS

1. Charging

Please use the Type-C cable for charging. (5V⎓2A)
It supports the input power of PD20W.

2. Oil Juice Filling


Open the oil-filling cap, align the oil bottle with the port, and squeeze to fill. Close the cap after filling.

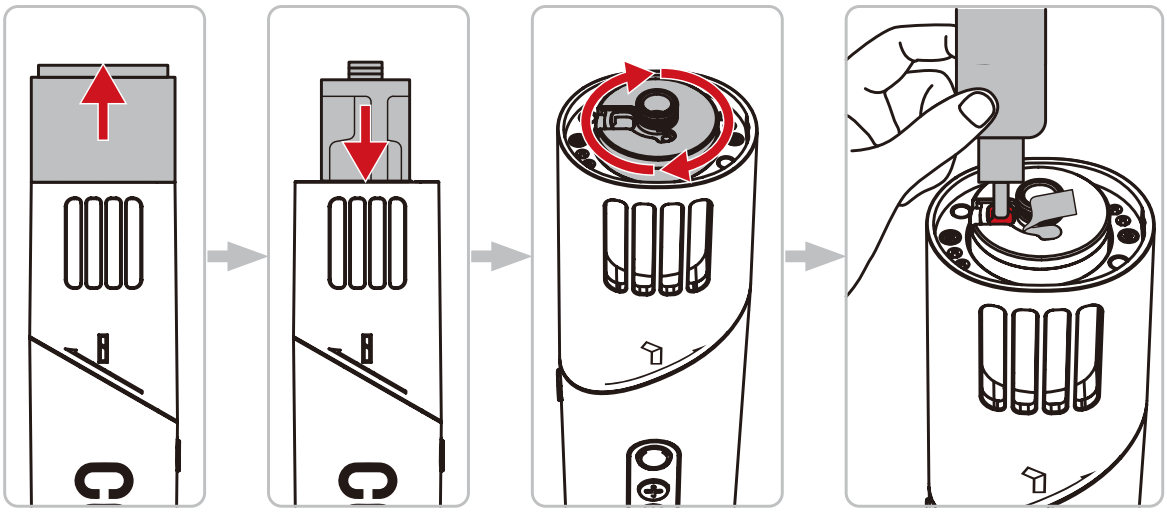

* For first-time use, please fill the chamber to over half and let it sit for 5 minutes before using.
* Check the oil level every 10 minutes during use. Refill if it falls below 1/3.
* Please turn off the power when refilling.
* Before powering on, ensure the chamber is installed and securely tightened.
* Fog juice remains. It is normal as we run a full product test before shipping. Wait 2 mins after refills before use.

3. Body Rotating

Press down the rotation lock button and turn the body.
Release the button to lock.

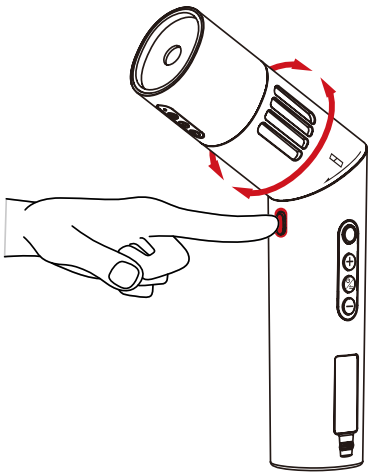


4. Power On/Off

Long press the power button for 3s to turn on/off.
It will auto-shut off after 5 minutes of inactivity.

5. Smoke Output/Stop Output

1. Long press the smoke output button to output the smoke, release to stop.
2. Continuously Output: Double-click the button to output the smoke continuously, double-click again to stop.

* GF5 will activate the overheat protection and stop outputting for 30 seconds after 5 minutes of continuous smoke output at Max. power. Please double press the smoke output button again to output the smoke.
* Ensure the oil covers the chamber bottom when outputting the smoke to prevent dry burning.

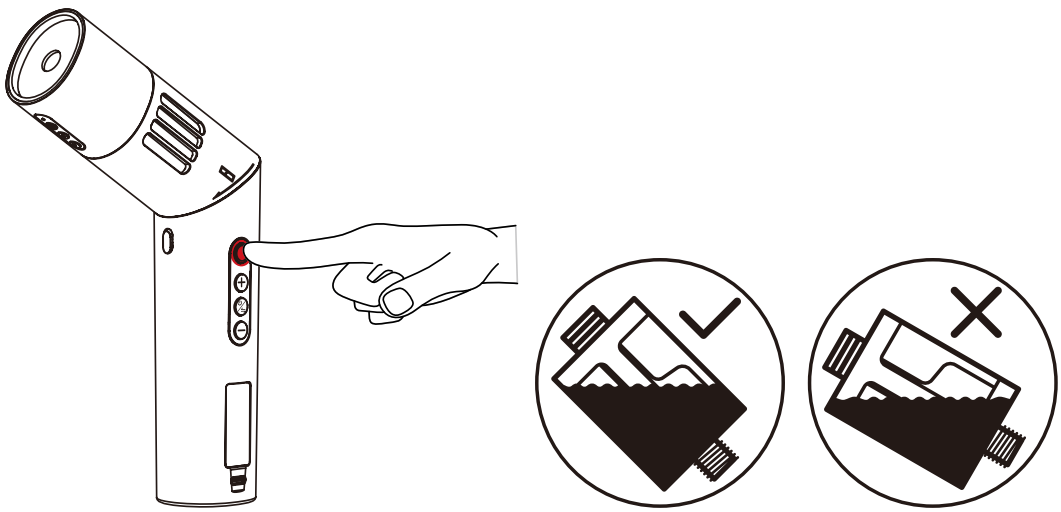

6. Smoke Parameter Adjustment

Short press the power button to cycle through options for density, output speed, and cycling parameters. The selected option will be highlighted.

6.1 Density


Select the density option, short press the +/- button to adjust (5 levels).

6.2 Output Speed


Select the output speed option, short press the +/- button to adjust (5 levels).

6.3 Output Cycling


Select the output cycling option, short press the +/- button to enter the output cycling settings page.




6.1



6.2



6.3

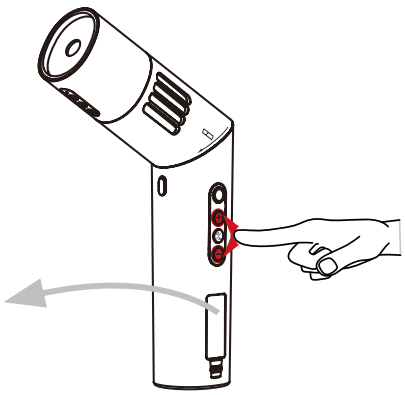

6.4 Settings

Short press the power button to cycle through options: cycle on/off, continuous output duration, output interval, and cycle times.

Press the +/- button to adjust the values, then short press the power button to confirm and move to the next option.

Short press the power button to select" ⮌ ", then press +/- to exit.

① Cycle On/Off: On/Off

② Continuous Output Duration:
5s-10s-15s-20s-25s-30s-35s-40s-45s-50s-55s-60s


③ Output Interval:
5s-10s-15s-20s-25s-30s-35s-40s-45s-50s-55s-60s


④ Cycle times: 0-98 times



7. Fan Speed/RGB Light

AdjustmentAttach the magnetic fan to the fog machine, press the M button to switch between RGB light mode/Fan mode.

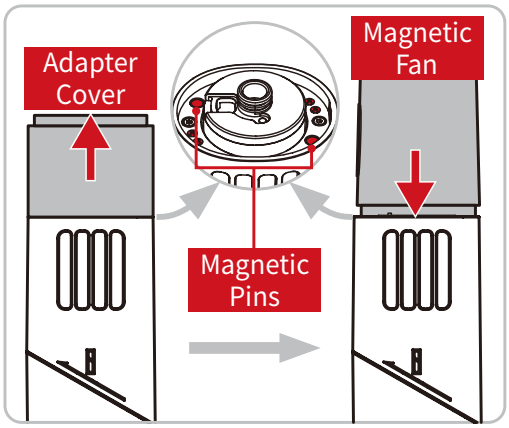

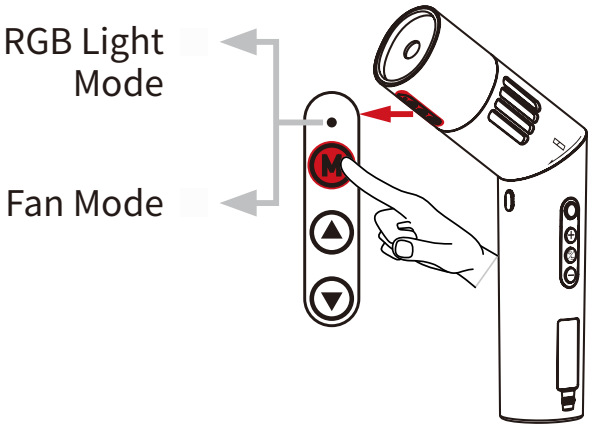


7.1 RGB Light Mode (Green Light):

Short press "▲"/ "▼" to adjust brightness (3 levels).
Long press " ▲" to select LED color,release to set the color.

7.2 Fan Mode (Red Light):

Short press "▲"/ "▼" to adjust fan speed (3 levels).

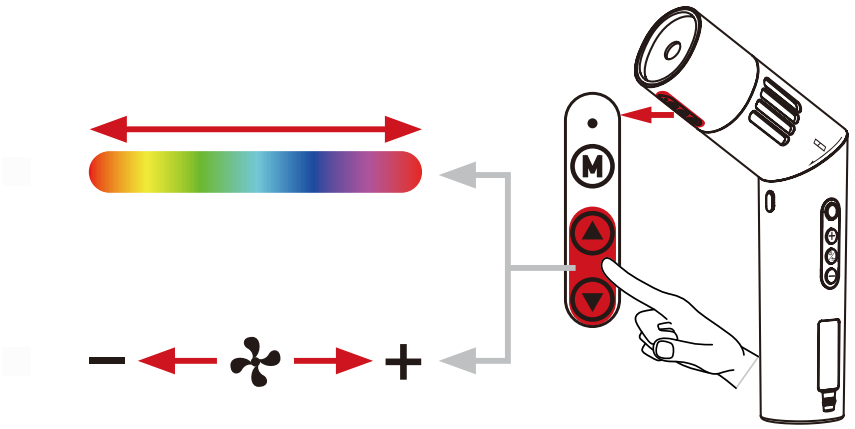

8. Remote Control

You can control multiple GF5 fog machines simultaneously within the remote's signal range.

8.1 Fan Speed Adjustment

Short press button,then short press the +/- button on the left side to adjust the fan speed of the magnetic fan.

8.2 Brightness & Color Adjustment


Short press button, then short press the +/- button on the left side to adjust the brightness. Long press the +/- button on the left side to adjust the color, release to set the color.

8.3 Density & Output Speed Adjustment

Short press button, then short press the +/- button on the right side to adjust the density and the output speed simultaneously.

8.4 Continuous Output/Stop Output

Short press button to start the smoke output. Short press again to stop.

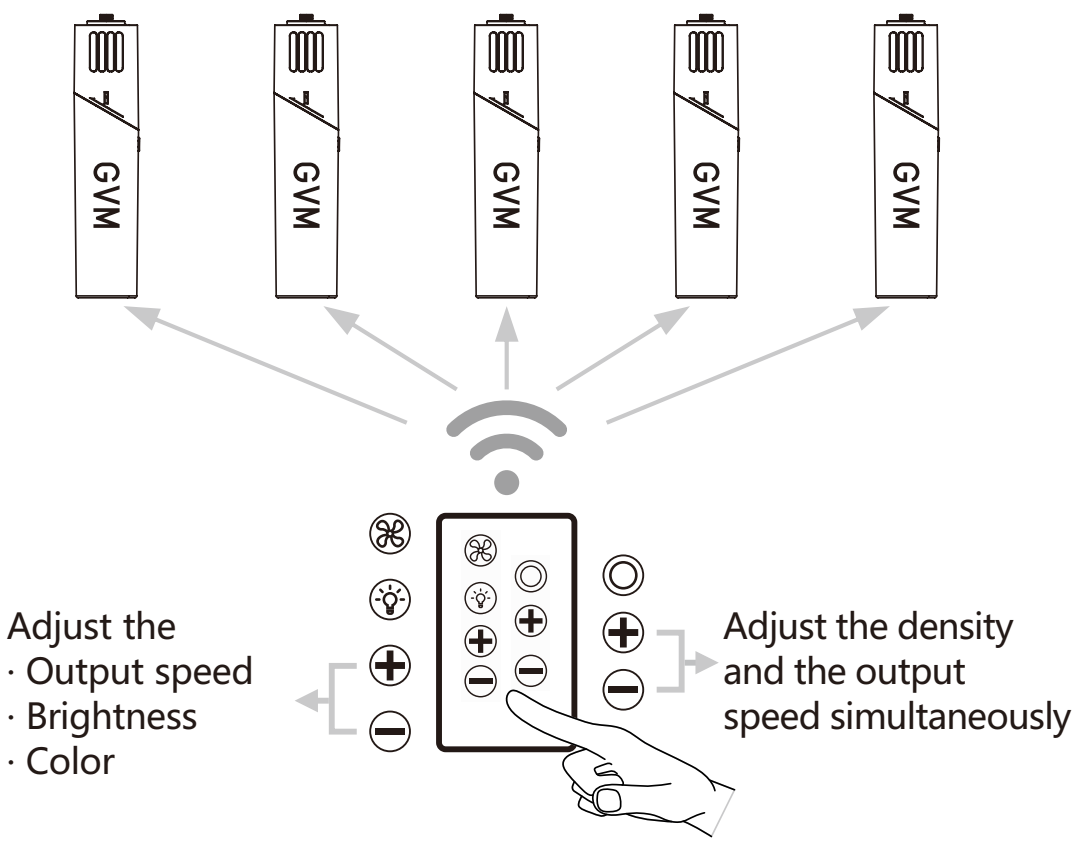

WARRANTY

Warranty Period

Thank you for purchasing COLBOR products.

1. Customers are entitled to free replacement or repair service in case of quality defect(s) found in the product under normal use within 30 days upon receipt of the product.
2. Original COLBOR products are entitled to 12-month limited warranty service. The warranty period begins on the date of purchase of brand new, unused products by the first end-user. Within the warranty period, if product defect or failure is attributable to material defection or technological problem, the defective product or defective part will be repaired or replaced without charge (service and materials fee).

Warranty Exclusions and Limitations

1. Faults resulted from inappropriate use of a product without following its operation specification.
2. Artificial damage, e.g. crash, squeeze, scratch, soaking, exposing to rain or damp.
3. Modifications to a product by its user or a third party without prior written consent of COLBOR, e.g. replacement of element or circuit, label alteration.
4. The code on product is inconsistent with that of warranty certificate, or the code on the product or warranty certificate is altered or torn off.
5. All consumable accessory attached to a product, like cable, cover6. Faults as a result of force majeure, such as fire, flood, lightning, etc.

Warranty Claim Procedure

1. If failure or any problem occurs to your product after purchase, please contact a local agent for assistance, or you can always contact COLBOR's customer service through email.
2. Please retain your sales receipt and warranty certificate as proof of purchase. If any of these documents is missing, only sales return or chargeable service will be provided.
3. If the COLBOR product is out of the warranty coverage, the service and the parts cost will be charged.

QC
PASS

GVM Official Website

Facebook

Huizhou Latu Film Equipment Co., Ltd.
Web: www.gvmled.com
B&H Email: bh@gvmled.com
GVM Email: support@gvmled.com
Amazon Email: amazonsupport@gvmled.com
Warehouse Address: 12285 MCNULTY RD, STE 105 PHILADELPHIA, Pennsylvania 19154, USA