→ 120.00 mm →

Power cord 1 2 3 Adapter 1 2 3 Diffuser 1 2 3 Barn-door 1 2 3


Light stand 2 3


Carrying case 1 1 1


Instructions 1 1 1

PACKING LIST



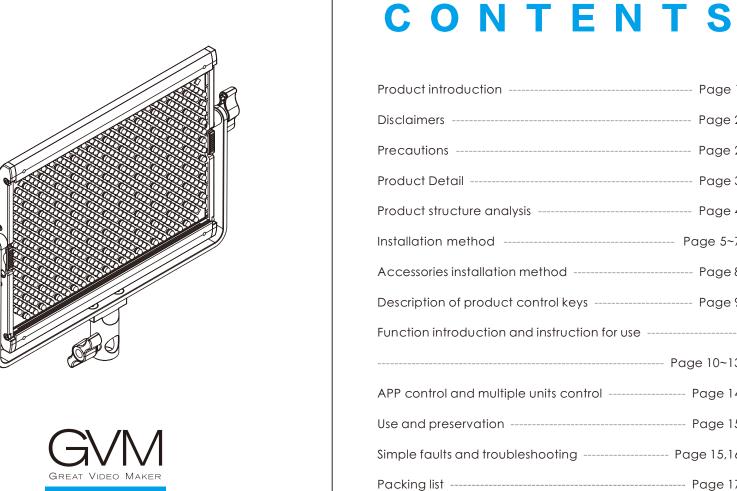

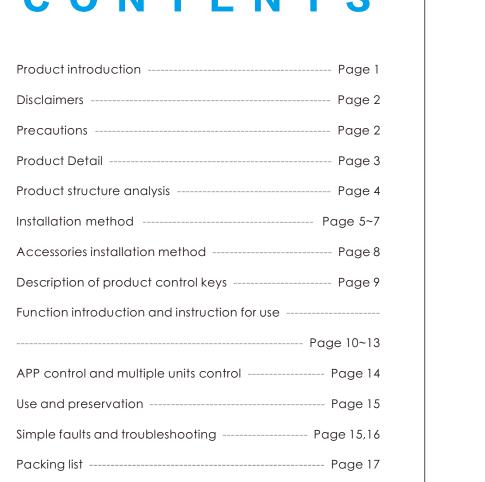

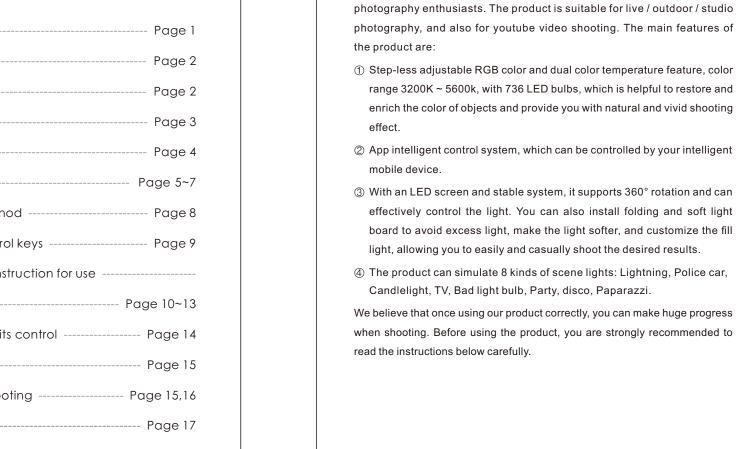

Welcome to "GVM-1000D". This product is specially designed for set

Product Name : Photography lights maybe cause harm to yourself and the people around, or even damage the Product Type : Photography Fill Light

carefully, understand and acknowledge all the terms and contents of this statement, Product material : Aluminum alloy and promise to take full responsibility for the use of this product and possible Lamp beads quantity: 736

App intelligent control system, which can be controlled by your intelligent

to reduce energy loss.

effectively control the light. You can also install folding and soft light board to avoid excess light, make the light softer, and customize the

④ The product can simulate 8 kinds of scene lights: Lightning, Police c

Candlelight, TV, Bad light bulb, Party, disco, Paparazzi.

when shooting. Before using the product, you are strongly recommended to

(5) If the product will not be used for a long time, please switch off the

Cooling: Natural heat dissipation

Hue: RGB 0°~360°SAT: 0%~100%

specification to power the product. Do not use power adapter with

Product Size (mm): 270*318*40

Brightness: 15000lux/0.5m, 5000lux/1m

Power supply: DC15V/4A

Features: RGB, SAT, APP (Bluetooth connection), Joint control, High CRI


Color temperature: 3200K~5600K

Light adjustment method : Step-less adjustment

Commodity origin: Huizhou, China

There are two power supply modes to choose.
 ① Connect the power cord and adapter for power supply.
 ② Purchase two other suitable lithium batteries and use them for power supply.

knobs on both sides of the U-bracket.

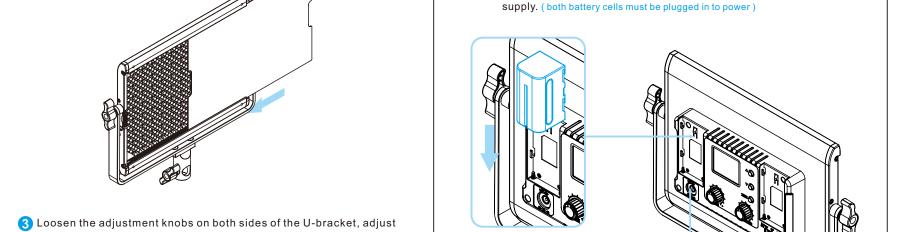

the angle of the panel you need, and then tighten the adjustment

Light control folding can control the Angle of light. Align the front mounting holes with the screw holes of the hinges and lock

1 DC15V power input interface 4 Change channel button: When is in master/slave mode, press this button to select the channel. 5 Brightness adjustment button: Adjust the brightnes

6 Multifunctional button: Press once to switch light mode. Press for 3

seconds to enter/exit the scene mode; Spin the knob to adjust the

7 LED screen: The screen display the current brightness, control mod

light mode, light parameters, scene number, channel numerical, and

parameters of the current light mode.

The screen display the current brightness, control mode, light mode, light

parameters, scene number, channel numerical, and battery power of the ligh

Channel value ———

 Press the mode button to change the control mode, such as: Rotate, slave, master, APP
Rotate mode: Adjust the parameters

⑤ Adjust HUE: range 0° ~ 360°

the light mode to HUE, and then turn the composite knob button to adjust

In APP mode, connect to APP and adjust hue through AF

synchronously. 6 Adjust SAT: range 0%~100% APP mode: adjust the light parameters through APP. • In Master mode / Rotate mode, short press the composite knob to switc

• Short press the compound knob to switch the light mode, which are: 0

• In APP mode, connect to APP and adjust SAT through APP.

CCT: adjustable color temperature, range 3200K~5600K

HUE: Adjustable light color, range 0°~360° 7 Adjustment scene (SC): range 1~8

SAT: adjustable light color saturation, range 0%~100% • In Master mode/Rotate mode, long press for 3 seconds and press the composite knob to enter/exit scene light (SC) mode. At this time, short SC: The product can simulate 8 kinds of scene lights: ①Lightning, ②Po

press the composite knob to select scenes, all scenes can be adjusted by rotating the brightness adjustment knob; the current scene When it car, ③Candlelight, ④TV, ⑤Bad light bulb, ⑥Party, ⑦Disco, ⑧Papara

Master mode: adjust the light and channel of the light through the controller behind the light, and the slaves of the same channel will also be adjusted

3 Adjust brightness (BRG): range 0%~100% • In Master mode / Rotate mode, turn the brightness adjustment knob t

In APP mode, connect to APP and adjust brightness through AP

In Master mode/Slave mode, tap the plus/minus key to set the channel valu

Switch the photography light to the APP mode, connect the Bluetooth of the video light through the mobile phone, and then use the APP to control the

brightness, color temperature, hue, sat, scene, channel, and on/off of the

Prepare two or more photography lights, set one to Master mode, a

Prepare two or more photography lights, set one to APP mode, and

mode, and set the same channel. When the APP mode machine connecte with the mobile phone APP and the slave machine channel are the same

at this time, the connected APP mode machine can be controlled th

connect the mobile phone APP to set the channel; set the rest to S

others to Slave mode, and set the channel (CH) of the master and sl When the master and slave channels are the same, the slave of channel can be synchronously controlled through the controller beh

named "BT_LED" and connect \rightarrow Wait for connection \rightarrow After connect

effect parameters ightharpoonup click the " ightharpoonup " icon in the right corner ightharpoonup pop up the Scenes" at this time.

channel as the connected APP mode machine.



Do not put the product in a highly humid, strong electromagnetic field, application software on the phone (The phone needs to turn on bluetooth and

load the battery, in order not the damage to machine.

ones, in order to maximize the performance.

ı	Own green	Seened1			
Ī	Grade Clay	Scened2 was der more eine Z 🔟 💽	Phenomenon	Check the product	
⊕ net	Date North	Scene02 History Alexander			
۱	y ² then	ScoreO4 Correction Misselfs Z D 🖸		① Check the matching power	M
26%	26% Scanielli Z @ O	Scondiff Z D 🖸	The switch indicator	adapter indicator light up or not.	con
0%	BRG 100% 0.3s	Scome00 ∠ © ⊙			
0.1s Cycle	56		does not light up	② When using lithium battery,	Ch

In RGB mode, the lamp beads have no RGB color.

Check whether the color purity salue is 100, the color difference is most obvious.

(1) In the Master mode / Rotate mode, lightly press the compound knob button to switch to SAT, then turn the compound knob button to increase the color purity; In WIFI mode, connect APP,

the "ON" state, the display and the display and the "ON" state, the display and the mobile phone the mobile

Check whether the device is

Ine brightness/
olor temperature
temperature of the products

The brightness and color pressthe "MODE" button for once, switch the mode from slave mode

cannot be controlled in slave to master mode.

APP can't in APP mode and whether ② Turn on bluetooth and GPS on

③ Open the APP, search and

connect to Bluetooth BT_LED

buttons of the controller behind the light. When the channels of the slav and the master are the same, they can be synchronously controlled

video light. If there is a slave, you can also go through the APP Perform

is scene No. ⑤, turn the compound knob to adjust the color temperature

adjust the time. (Other scenes can only adjust the brightness).

when the current scene is scene No. 6 or 7, turn the compound knob to

• In the APP mode, connect to the APP and adjust the scene through the APP.