
→ 120.00 mm →



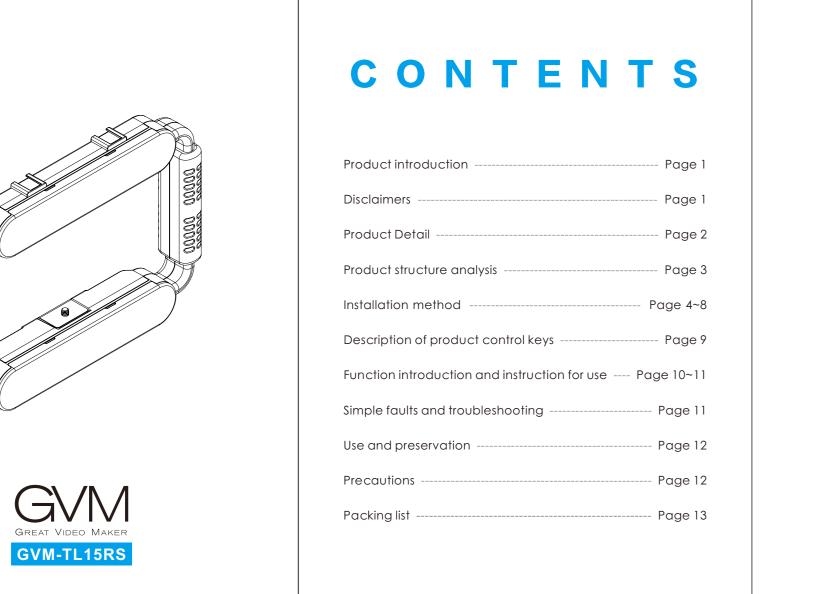

- Welcome to "GVM-TL15RS". This product is specially designed for senior photography enthusiasts. The product is suitable for live / outdoor / studio photography, and also for
- YouTube video shooting. The main features of the product are: ① Infinitely adjustable RGB color and dual color temperature characteristics, brightness/ color temperature/RGB hue/color purity are all.It can be controlled at will, the color temperature range is 3200K~5600K. Having 152 LED bulbs helps,To restore and
- ② Adopts battery power and DC input Dual power supply design: equipped with battery for outdoor use, optional adapter can use DC input for long-term continuous power
- Product material: Plastic Light adjustment method: Stepless dimming the product correctly. If you don't obey the instructions and warnings, you maybe cause harm to yourself and the people around, or even damage the product and Power supply mode : DC input & Battery
- carefully, understand and acknowledge all the terms and contents of this statement, and promise to take full responsibility for the use of this product and possible

- Product Name: Photography Light Product model: GVM-TL15RS
- ③ With electronic display and stable system. Small size and light weight, it can be
- work. Before using the product, we strongly recommend that you carefully read the Product net weight: 0.45KG

Party, Disco, Paparazzi.

following user guide.

consequences.

- We firmly believe that the correct use of this product will definitely help your shoot

- enrich the colors of objects, to provide you with natural and vivid shooting effects.
- hand-held to customize control to fill light, and it is easy to carry. Let you shoot the results you want easily.

 - - Voltage: AC100V~240V
 - Battery Capacity: 7.4V-2200mAh*1

Power supply: DC 9V/3A (Power adapters are not provide and need to be purchased separately) Place of Origin: China. Huizhou

- Function/Features: High CRI, RGB Light, Scene Light, OLED Screen

- Brightness: 1600lux/0.5m; 700lux/1m


Power: 15W


- Heat dissipation: Self-heating
- other things around.

- Product Type: Photography fill light
- ◆ Color rendering index: ≥97 Color temperature: 3200~5600K
- 8 kinds of scene lights can be simulated: Lightning, Cop Car, Candle, TV, Bad Bull
 - - Battery Slot ____


OLED display

1 Install the diffuser as below picture.

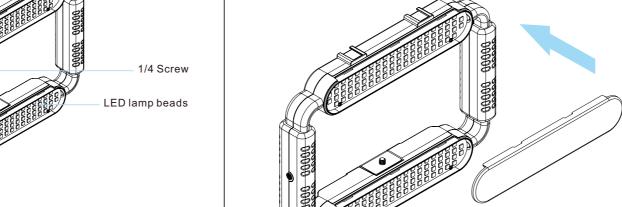

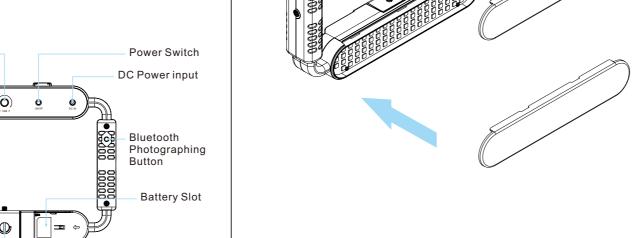

counter-clockwise to disassemble it.

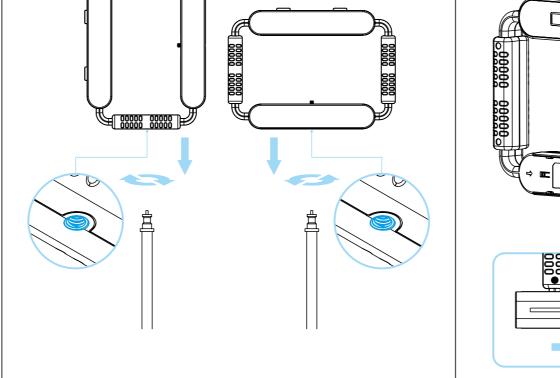


Rotate clockwise to assemble the light onto the stand and rotat


② Insert a lithium battery into the battery slot and use the battery for power. (Single or dual battery both work.)


There are two power supply modes to choose

① Purchase a power cord and adapter separately, connect the power cord

Battery mounting slot

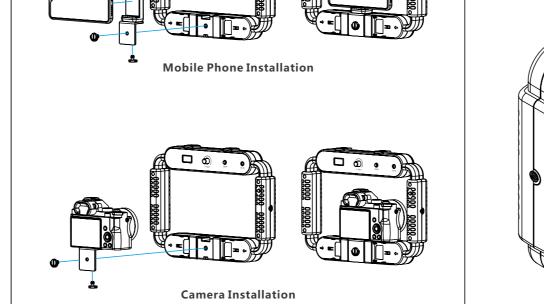

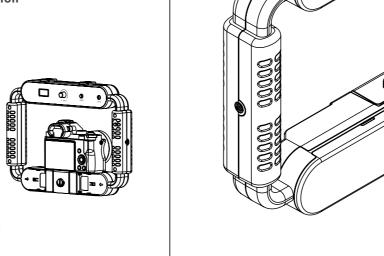

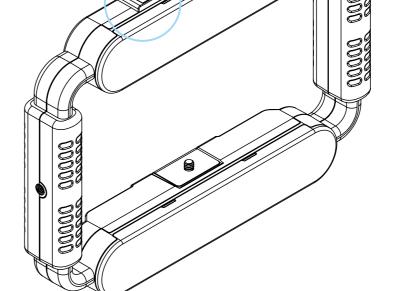

5 The two cold shoe mounts are compatible with various cameras.

1 DC power input interface: Connect the power cord and adapter for power supply. (Adapter is to be purchased) Power switch: Long press to turn on. 3 Compound knob: Long press this knob to switch the light mode; short press this knob to select the light parameter turn this knob to adjust the currently selected light paramete

4 OLED display: display the current information of the photograph

5 Mobile phone Bluetooth camera button: Open the Bluetooth

on the mobile phone and connect it to GVM-HL. You can take

photos with the mobile phone via the Bluetooth Photographing

Long press the compound knob to switch modes. Modes include CCT, HSI, SCENE

Long press the compound knob button to switch to SCENE mode \rightarrow short press

the compound knob button to select $\mathsf{MOD} \to \mathsf{turn}$ the compound knob button to

switch scenes \rightarrow short press the compound knob button to select the parameter **HSI** (RGB color light mode): Adjustable brightness, hue, color purity

to be adjusted \rightarrow rotate the compound knob button to adjust the currently

SCENE (Scene light mode): Adjustable scene light, there are 8 kinds of scene Lightning, Cop Car, Candle, TV, Bad Bulb, Party, Disco, Paparazzi.

Adjust brightness (BRG): Range 0%~100%

nere is brightness adjustment in any mode. Long press the compou

to select BRG → turn the compound knob button to adjust the brightness

button to switch to the desired mode → short press the compound knob

Long press the compound knob button to switch to HSI mode → short press the

compound knob button to select HUE → turn the compound knob button to a

3 Adjust color temperature (CCT): Range 3200K~5600H

① When using lithium battery, make sure is well contacted with Long press the composite knob button to switch to CCT mode → short press there's no "low power" protection. composite knob button to select CCT → turn the composite knob button to adjust

indicator light up or not.

Check whether the color purity SAT

Color cannot value is too low or 0; the color purity be adjusted value is 100, the color difference is SAT value in HSI mode.

(Buy separately)

the most obvious.

Long press the composite knob to switch to HSI mode \rightarrow short press the composite

knob to select SAT \rightarrow turn the composite knob to adjust the color purity.

6 Adjust the scene mode (SCENE):

not light up ② Check the matching power adapter Charge the battery

- 3 The product is not anti-corrosion, therefore do not let the product touc
- any corrosive liquid.

Guarantee: Do does not modify the product, or you will lose the right of maintenance.

Do not put the product in a highly humid, strong electromagnetic field, direct sunlight,

Clean: Before clean, disconnect the power plug. And use wet cloth rather than any

Power: Make sure the power is in the demanded range, not too high or too low. Correctly load the battery, in order not the damage to machine.

Repairing: If there is fault or performance degradation, do not unpack the shell by yourself, avoiding damage the machine and lose the right of maintenance. When there is a fault, do not hesitate to contact us, and we will do our best to deal with the problem.

high-temperature environment. If not use the product for a long time, disconnect the

Please use the matching power adapter or lithium battery with the same

specifification to power the product. Do not use power adapter with

ones, in order to maximize the performance.

power and take out the battery.

The product is not waterproof, please use it in rainproof environment.

When using the product, make sure the product is put fifirmly and prevent

If the product will not be used for a long time, please switch off the power to reduce energy loss.

User Manual 1