

封底的另一面留白，书本形式

封底 封面 封面内页


120.00 mm

PACKING LIST

Name	Quantity	Notes
Photography light	1	
Power cord	1	
Adapter	1	
Condenser	1	
Diffuser	1	
Carrying bag	1	
Instruction	1	

13

GVM
GREAT VIDEO MAKER



GVM
GREAT VIDEO MAKER
GVM-SD200S

Web: www.gvmled.com
B&H Email: bh@gvmled.com
GVM Email: support@gvmled.com
Amazon Email: amazonsupport@gvmled.com
Warehouse Add: 4301 N Delaware ave, unit D, PHILADELPHIA, PA 19137, USA

C O N T E N T S

Product introduction	Page 1
Disclaimers	Page 2
Use and preservation	Page 2
Product parameter	Page 3
Product structure analysis	Page 4
Installation method	Page 5-7
Description of product control keys	Page 8
Function introduction and instruction	Page 9-10
APP control	Page 11
Simple faults and troubleshooting	Page 12
Precautions	Page 12
Packing list	Page 13

PRODUCT INTRODUCTION

Welcome to "GVM-SD200S", this product is specially designed for senior photography enthusiasts. The product is suitable for live streaming / outdoor / studio photography, and also for YouTube video shooting.

The main features of the product are:

- With color temperature 5600K and stepless adjustable light brightness, the "GVM-SD200S" light has a high color rendering index CRI 97+ COB lamp bead which could help to restore and enrich the color of objects and provides you with natural and vivid shooting effects.
- App intelligent control system, which can be controlled by your intelligent mobile device.
- "GVM-SD200S" has an LCD display and a stable system. It supports 360° rotation which can effectively control light. It is also equipped with a standard lampshade, after installation, the lampshade can help to avoid excess light and make the light more concentrated. Customized control of fill light allows you to shoot the desired results as easily as you want.

8 kinds of scene lights can be simulated: Lightning, Flash, Candlelight, TV, Bad Light Bulb, Explosion, Firework, Paparazzi.

We firmly believe that the proper use of this product will certainly be of great help to your shooting work. Before using the product, we strongly recommend that you read the following user guide carefully.

DISCLAIMERS

- Before using this product, please read the instructions carefully and make sure to use the product correctly. Failure to follow the instructions and warnings may cause injury to you and your surrounding people, and even damage the product or other surrounding items.
- Once you use this product, you are deemed to have carefully read the disclaimers and warnings, understand and acknowledge all the terms and contents of this statement, and promise to take full responsibility for use of this product and the consequences that may result.
- Design and specifications are subject to change without notice.

USE AND PRESERVATION

Do not expose the product to high humidity, strong electromagnetic fields, direct sunlight, or high temperatures. If the product is not used for a long time, please disconnect the power supply.

Clean: Before cleaning, please unplug the power supply and use a damp cloth instead of any cleaning agent or soluble liquid to avoid damaging the surface layer.

Power: Make sure the power is within the demanded range for use, not too high or too low. Insert the battery correctly to avoid damage to the machine.

Repairing: If there is fault or performance degradation, please do not unpack the shell by yourself to avoid damage to the machine and loss the maintenance rights. In case of malfunction, please do not hesitate to contact us and we will do our best to deal with the problem.


Accessories: Please use the accessories or accessory products which supply or approved by the manufacturer for best performance.

Guarantee: Please do not modify the product or you will lose the right to maintenance.

PRODUCT PARAMETER


- Brand : GVM
- Product Name : Photography Lights
- Product Model : GVM-SD200S
- Product Type : Photography Fill Light
- Lamp Beads Quantity : COB*1
- Color Rendering Index : ≥97
- Color Temperature : 5600K
- Lumen : Naked lamp : 7600lux/1m
Add Standard Lampshade : 30600lux/1m
- Light Adjustment Method : Stepless Adjustment
- Function / Feature : LCD Screen, High Display, APP Control, Master/Slave Mode Control, DMX Control
- Product Net Weight : 3.15KG
- Product Size (mm) : 228x123x349
- Power : 200W
- Voltage : AC 100-240V
- Power Supply Mode : DC Input
- Power Supply : 32V/7A
- Cooling : Radiator & fan cooling
- Product Material : Aluminum Alloy + Plastic
- Commodity Origin : Huizhou, China

PRODUCT STRUCTURE ANALYSIS

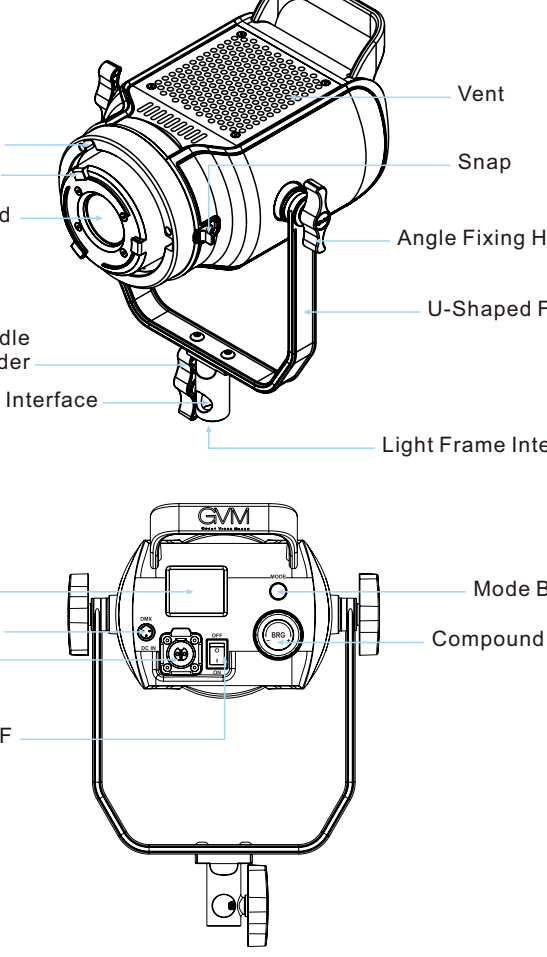


INSTALLATION METHOD

- The lamp can be installed and fixed on the bracket by rotating the knob clockwise, unloaded by rotating in the counterclockwise direction.

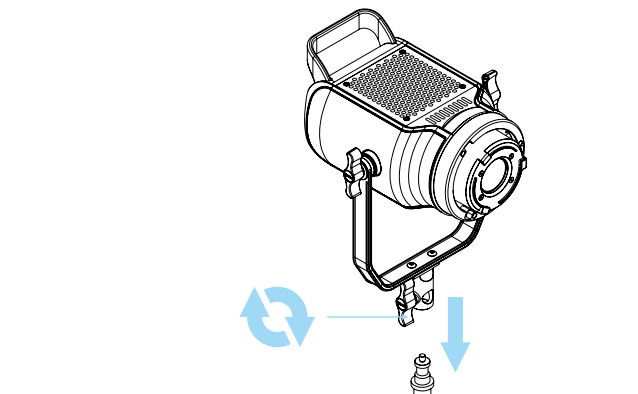

- Insert the Bowens mount of the standard lampshade into the Bowens mount of the light, and then turn it slightly clockwise.

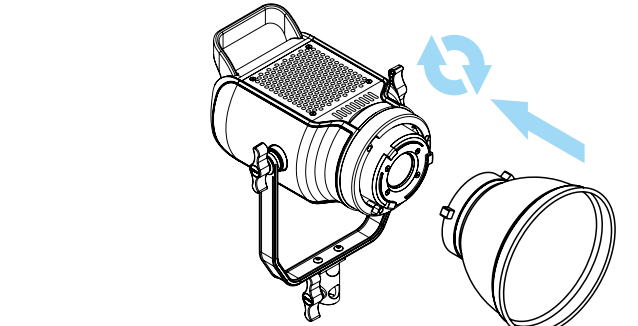

DESCRIPTION OF PRODUCT CONTROL KEYS

- Power Input Interface
- Switch ON/OFF
- LCD display: Display the current mode and parameters of the light
- Composite knob: long press for 2 seconds to enter/exit scene mode (SC), short press to enter/exit the current scene adjustment, turn the knob to adjust brightness, channel and select scene.
- Mode button: Switch the control mode. The modes include: rotate, slave, master, APP, DMX
- DMX interface: DMX console input and output interface

FUNCTION INSTRUCTION & INSTRUCTION FOR USE

- LCD Screen:** Display the current brightness, control mode, light effect mode, light parameters, scene number, and channel value of the light.
Scene number (Only display when the light is in Scene Mode)
Brightness
Channel value
Control mode (only display current mode)
Time parameters (can only be adjusted when the light is in some specific scenes)
- Mode Types and Functions:** Press the Mode Button to switch the control modes, which are: Rotate, Master and Slave, APP, and DMX.
Rotate mode: The brightness can be adjusted through the compound knob.
Master mode: The brightness can be adjusted through the compound knob.
Slave mode: The channel can be adjusted by the compound knob. When the channels of the Slave light and the Master light are the same, they can be synchronously controlled by the Master light.
APP mode: In this mode, the channel can only be adjusted by the compound knob. The light can be adjusted through the APP.
DMX mode: Connect to the DMX console, adjust the brightness through the DMX console.
- Adjust Brightness(BRG): Range 0%~100%**
 - Rotate Mode or Master Mode: Turn the compound knob to adjust the brightness.
 - APP Mode: Connect to the APP and adjust the brightness through the APP.
 - In DMX mode, adjust the brightness through the DMX console.

SIMPIE FAULTS AND TROUBLESHOOTING

Phenomenon	Check the product	Solution
The switch indicator does not light up	Whether the connection between the lamp and the power supply is normal.	Make sure the adapter is well contacted with the power plug.
The product is in the "OFF" state, the display and lights are not on	Check if the product is "turned off" by the other APP.	① Restart the product. ② Press the APP switch ON/OFF button
APP can't connect / can't control	Check whether the device is in APP mode and whether "BT_LED" is displayed on the APP.	Normal steps: ① Switch to APP mode after booting; ② Phone with Bluetooth and GPS on; ③ Open the APP, search and connect to Bluetooth BT_LED.

PRECAUTIONS

- The video light is not waterproof, please use it under rainproof environment.
- The video light is not anti-corrosion, please don't let the light come into contact with any corrosive liquid.
- When you use the light, make sure that the product is placed firmly to prevent the product from falling and being damaged;
- When the product is not used for a long time, please turn off the power to save energy loss.