


→ 120.00 mm →



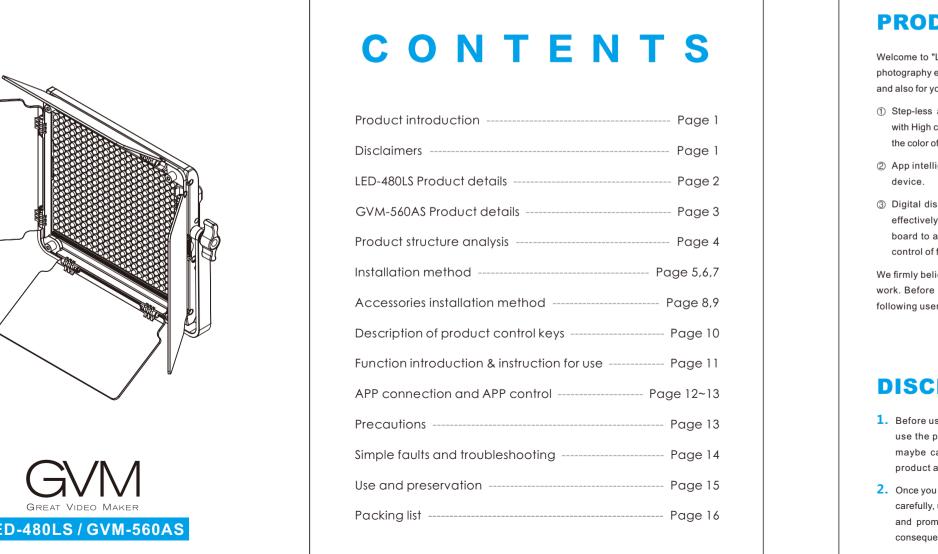

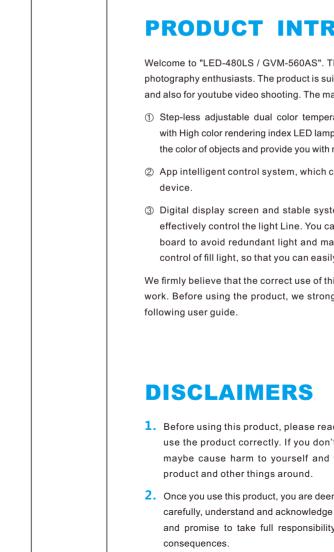

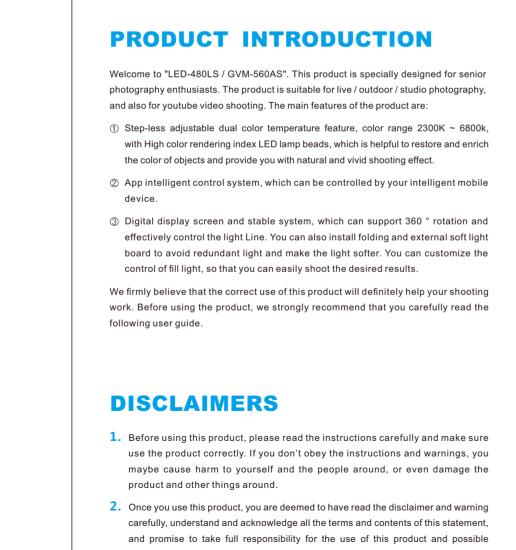


Type: Photography fill light Material : Aluminum alloy Number of light beads: 480 ◆ Color-rendering Index : ≥97 Color Temperature: 2300K---6800K Luminance: 13000lux/0.5m, 3500lux/1m Function/Characteristics: APP, High color rendering index light beads Light angle of lamp bead: 45° Power Supply Mode : DC input & Battery Voltage : AC:100-240V

Power specification : DC15V/3A

Heat Dissipation : Natural way

Brightness adjusting : Stepless adjustment


Weight: 1KG

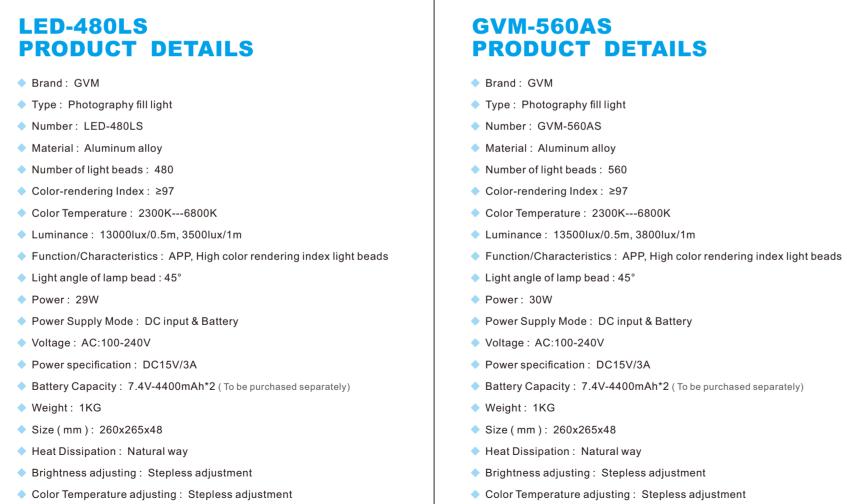



Origin : Huizhou, China


LED lamp beads Lamp holder fixing knob Battery tank

1 The lamp can be installed and fixed on the bracket by rotating the knob clockwise, and unloaded by rotating in the counterclockwise direction Lamp rack interface Electronic display Indicator light

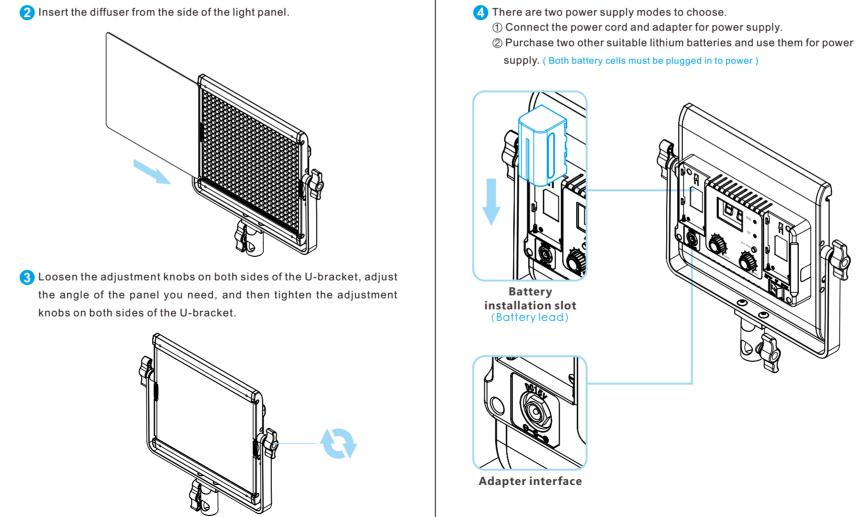

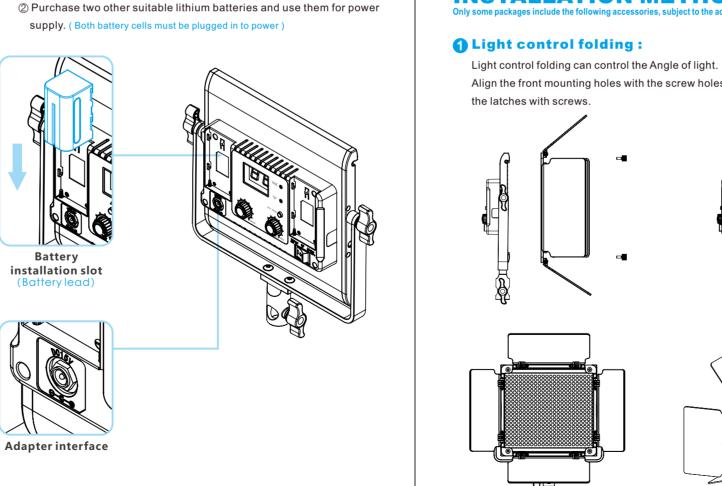

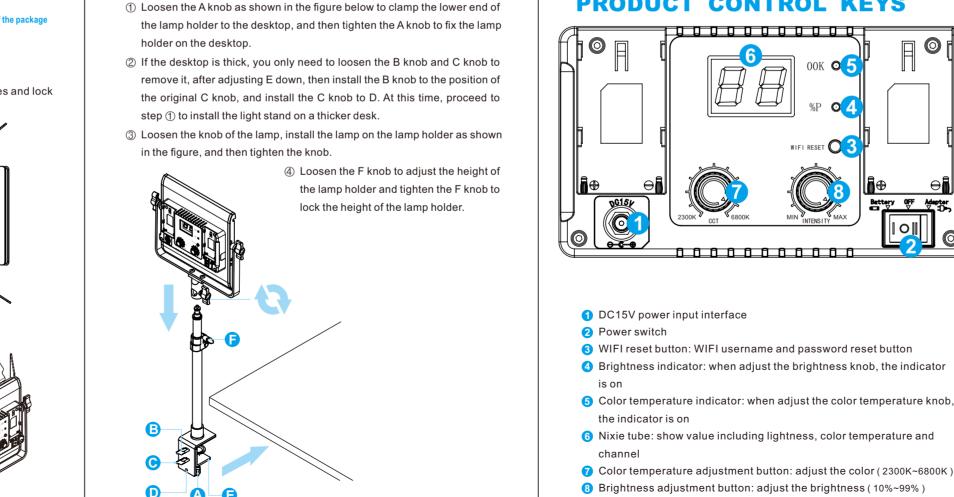

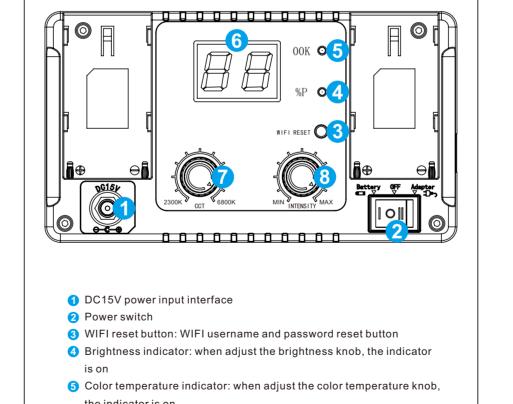

when switching on the machine), open "GVM Easily" APP on the mobile phone This product has two control modes: knob control and APP control. (meanwhile turn on WIFI on the phone), in the main menu in the APP----switch the devices---select "Singe/Double color temperature light", then in the main Rotating brightness adjusting rotary knob can adjust color temperature • When the brightness is adjusted by brightness level knob or APP, the brightness indicator light is on and the color temperature indicator light • When the color temperature is adjusted by the color temperature adjust

"Device connection GVM_LED", return back to the main interface, after i shows "Connected" in the main interface, it is allowed to control the lightness color temperature, channel value or switch on and off through the control key in APP, and also the slave machines.

Set master mode for the photography light (automatically as a master mod

Please use the matching power adapter or lithium battery with the san specification to power the product. Do not use power adapter with

- different output voltage parameters.
- The product is not waterproof, please use it in rainproof environme The product is not anti-corrosion, therefore do not let the product tour
- any corrosive liquid. When using the product, make sure the product is put firmly and preven

t is able to reset the WIFI username and password if long

button for over 5 seconds. After resetting, the username and the pass

return to the initial (WIFI username: GVM_LED, WIFI password: gvm_admi

- 5) If the product will not be used for a long time, please switch off the power

① Check the matching power Make sure the adapter is well

connected in WiFi mode,
the can't whether the WiFi is successfully booting;

successfully
connected, but
the device cannot
connect to the

Check if the "Switch Device"
type in the APP main menu is
switched to "Singe/Double
color temperature light".

Click APP main menu → Switch
device → Singe/Double color
temperature light

connect to the color temperature light".

connected, and whether ② Successfully connect to WiFi;

"Connected" is displayed on the 3 Open the APP and the

make sure there's no "low power" protection.

Do not put the product in a highly humid, strong electromagnetic field

long time, disconnect the power and take out the battery. Clean: Before clean, disconnect the power plug. And use wet cloth rather than any

Photography 1 2 3 2 detergent or soluble liquid, avoiding damaging the surface layer.

Repairing: If there is fault or performance degradation, do not unpack the shell

is a fault, do not hesitate to contact us, and we will do our best to deal with the pro

Accessories: Please use the accessories provided by manufacturer and approv ones, in order to maximize the performance.

The product is in the "ON" state, the display and lights are not on Check if the product is "OFF" because of the APP of the mobile phone.

Guarantee: Do does not modify the product, or you will lose the right of maintenance

Check whether the WiFi is Normal steps:

Adapter 1 2 3 2

Desktop Light Stand

Color filter

Light stand 2 3

Carrying Case 1 1 1 1

Instructions 1 1 1 1

Barndoors 1 2 3 2

PACKING LIS





























